

## #Technical data

Model	Z122R	
<b>Engine</b>		
Type	Petrol, air-cooled V-Twin	
Horsepower (Net)	kW/hp	14.1/19
Total displacement	cm <sup>3</sup>	726
Fuel tank capacity	l	12.2
<b>Transmission</b>		
Type	Independent T/M	
Supplier and model	Hydro Gear EZT <sup>®</sup> (ZT-2200)	
PTO drive system	Belt Drive	
Speed control	2 hand levers with height and angle adjustment	
Parking brake system	Cog Loc/Hand Lever	
<b>Tyre size</b>		
Front	11 x 4 – 5 smooth	
Rear	18 x 7.5 – 10 turf	
<b>Travelling speed range</b>		
Forward	km/h	0 – 10.5
Reverse	km/h	0 – 6.4
<b>Dimensions</b>		
Overall length	mm	1,890
Overall width w/o discharge deflector	mm	1,075
Overall height	mm	1,650
Wheelbase	mm	1,235
Weight	kg	282
<b>Mower deck</b>		
Cutting width	cm (inch)	107 (42)
Discharge	Side (Mulching kit available as option)	
Cutting height ranges	mm (inch)	38 – 108 (1.50 – 4.25)
Cutting height increments	mm (inch)	6 (0.25)
Deck pan depth	mm (inch)	114 (4.5)
Deck pan thickness	Ga. (mm)	11(3.0)
Deck construction	Fabricated	
Mower location	Mid mount	
Mounting method	Parallel linkages	
Adjustment of cutting height	Dial adjustment system	
Mower deck lifting method	Mechanical Foot Lift Pedal	
Driving method	Belt Drive	
Number of Blades	2	
Washport	1	
Fuel gauge	Sight Window type	
Seat	18inch Deluxe High Back Seat	
Rops	Standard. ISO21299	
PTO clutch	Electromagnetic	
Cup holder	Standard	
Hour meter	Standard	

The company reserves the right to change the above specifications without notice.  
This brochure is for descriptive purpose only. Some of the items pictured in this brochure are optional, and not standard equipment.  
Please contact your local Kubota dealer for warranty, safety or product information.

### Kubota (U.K.) Limited

Dorner Road Thame, Oxfordshire, OX9 3UN

<http://www.kubota.co.uk>

This publication may not be reproduced in whole or in part in any form without the prior written consent of KUBOTA. It corresponds to the status at the time of going to press. The manufacturer reserves the right to change technical specifications without notice. Some of the parts shown in the publication are optional and are not part of the standard equipment. Information on warranty and safety as well as further product information can be obtained from the responsible KUBOTA authorized dealer.

v\_1/2021



For Earth, For Life  
Kubota



# The best is exactly good enough

A central feature of Kubota's Z122R-Series is the zero-turn principle, which makes these mowers uniquely manoeuvrable. Kubota has equipped these machines with additional features that guarantee their excellent cutting quality and impressive large-area performance.

## Seat with high backrest

The spacious upholstered operator's seat with its high backrest keeps you comfortable even during extra-long mowing operations.

## Adjustable seating position

The seat rails allow you to move the operator's seat back and forth over a wide range. This ensures that you can find the seating position that offers you maximum comfort.

## Easy lifting and cutting height adjustment

The mower deck lifting system is operated by foot control making the operation very easy. Adjusting the cutting height is done via a dial gauge on the control panel.

## Roll bar as standard

Total peace of mind: for your safety, the Z122R is equipped with a high and stable roll bar.

## Easy-action steering levers

The two steering levers give you the smooth, precise control you need for fine lawn trimming and working around trees and flower beds. For even greater ease of use, you can adjust the levers to suit your height.

## Handy cup holder

The integrated cup holder means that your drink is always ready to hand.

## Generous legroom

The large operator platform has ample legroom. This also makes it easier for you to get on and off the machine.



## #Features



### One mowing deck for top results

The welded mowing deck with 107 cm working width and 114mm depth produces outstanding cutting quality at a professional level. The result is faster and better mowing.



### Optional mulching equipment

The optional mulching equipment transforms the standard mower into a high-precision mulching mower that produces the finest mulch and feeds it directly back into the turf.



### Ergonomic controls

All levers and switches are clearly arranged for quick, easy and user-friendly access.


### Precise cutting height adjustment

The cutting height can be adjusted in precise 6 mm steps by simply turning the control dial.



### Powerful engine

You can rely on the Kawasaki V-twin engine for every mowing job. Quiet and fuel-efficient, the engine delivers the power you need to get the job done, every time.

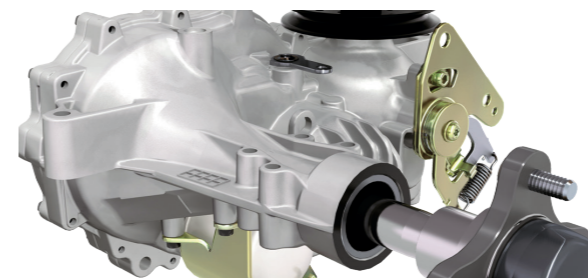

### Robust gearbox

The independent hydrostatic transmission (HST) delivers concentrated power and efficient transmission to the wheels.



### Simple maintenance

You can easily access the oil dipstick and air filter without removing a cover. As there are no lubrication points, servicing the machine is easy. You will also appreciate the practical cleaning connection. Whenever you want to wash off wet grass, all you have to do is connect the hose.

Model		GZD21-HD	
<b>Engine</b>			
Type	Kubota D782		
Model	Liquid-cooled, 3-cylinders diesel		
Displacement	cm³	778	
Engine gross power (SAE 1995)	hp (kW)	21 (15,6)	
Maximum operating engine speed	rpm	2,880-2,980	
Fuel tank capacity	l	19	
<b>Tractor</b>			
Mower position	Mid-mount		
Tyre size	Front	mm	15 x 6.0-6
	Rear	mm	23.0 x 10.5-12
Wheelbase	mm	1,285	
Overall length	mm	2,865	
Overall width	mm	1,280	
Overall height	mm	1,950	
Weight (with mower and GC, without fuel)	kg	640	
<b>Drive train</b>			
Speed	Front	km/h	0-15.5
	Rear	km/h	0-11.5
T/M drive system	Shaft drive		
Mower drive system	Shaft drive		
Drive system	2-HST		
Steering style	2-hand levers		
Parking brake	Wet multi-discs, mechanical equalising brake system		
Turning radius	m	0	
<b>PTO</b>			
PTO clutch	Hydraulic wet multi discs		
PTO brake	Hydraulic wet single discs		
<b>Mower</b>			
Cutting width	cm (inch)	121,9 (48)	
Lift system	Hydraulic		
Mount system	Parallel linkage		
Blade drive system	Hex belt, gear		
Cutting height	mm (inch)	25-127 (1-5)	
Cutting height adjustment	Dial		
Maximum mower lift height	mm	145	
Number of blades	3		
<b>Grass collector</b>			
Type	High dump/hydraulic		
Capacity	l	500	
Maximum lift height	m	1.80	

The company reserves the right to change the above specifications without notice.  
This brochure is for descriptive purpose only. Please contact your local Kubota dealer for warranty information.

## Kubota (U.K.) Limited

Dormer Road Thame, Oxfordshire, OX9 3UN

<http://www.kubota.co.uk>


This publication may not be reproduced in whole or in part in any form without the prior written consent of KUBOTA. It corresponds to the status at the time of going to press. The manufacturer reserves the right to change technical specifications without notice. Some of the parts shown in the publication are optional and are not part of the standard equipment. Information on warranty and safety as well as further product information can be obtained from the responsible KUBOTA authorized dealer.

v\_1/2021



# Performance and results in perfect harmony

Thanks to their excellent manoeuvrability, GZD-Series mowers meet the needs of both experienced and novice mowing specialists. These zero-turn diesel mowers combine exceptional manoeuvrability with an extremely efficient direct grass collection system with low or high discharge.

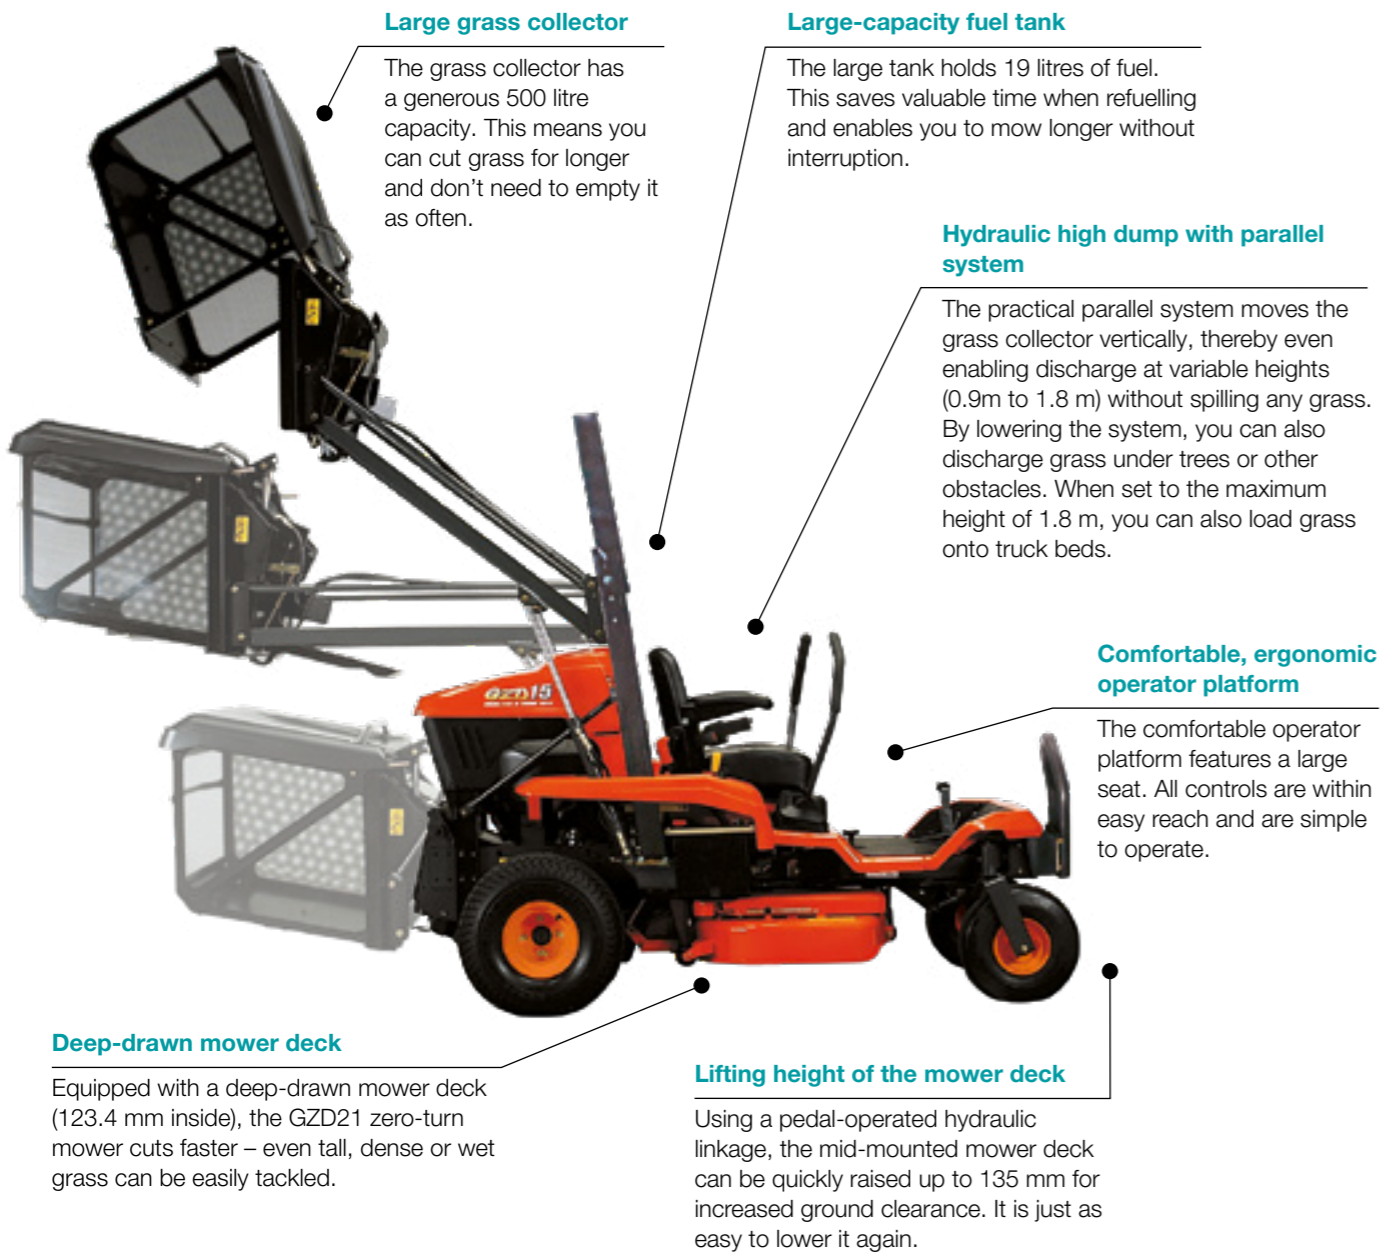

## #Features



### 2-lever control

The independent left and right steering levers give the GZD21 zero-turn mower amazing maneuverability at the slightest touch – including a 360-degree turning radius.



### Central cutting height adjustment

The cutting height can be easily adjusted from the operator's seat from 2.5-12.7 cm via the central cutting height adjustment. You can also make fine adjustments.



### Quick cleaning

The Quick Clean system effectively prevents blockages in the discharge channel. The channel can be easily cleaned from the operator's seat.



### Mower deck with cardan shaft drive

When it comes to drive systems, shafts are still the most durable. That's why the mid-mounted mower deck on the zero-turn mower has a highly reliable and quiet shaft drive.



### Transmission with cardan shaft drive

Kubota's large-volume, shaft-driven hydrostatic transmission features a smooth, quiet and maintenance-free axle drive. Power is transmitted via a shaft directly from the engine to the transmission and from there to the tyres via a toothed gear.

### Wet multi-plate clutch and disc brakes in oil bath

Kubota's incomparable wet multi-plate clutch is so durable that it outlasts most others, while the oil-bath disc brake provides superior braking power for safer operation.